




CR 3 Hd

CR 3

CR 5 E

TYPE	CR 3 Hd	CR 3 / CR 3 E	CR 5 Hd	CR 5 / CR 5 E
Operating weight CECE, kg	203	206 / 224	280	296 / 311
Working width, cm	50 (60/70)	50 (60/70)	55 (70)	55 (70)
Centrifugal force, kN	35	35	42	42
Frequency, Hz	80	80	75	77
Engine	Honda GX 270 4-stroke, gasoline	Hatz 1B20 Diesel	Honda GX 270 4-stroke, gasoline	Hatz 1B30 Diesel
Engine output max., kW (HP)	6.3 (8.6)	3.5 (4.8)	6.3 (8.6)	5.4 (7.4)
Power output at operating speed	5.1 (7.0) at 3,000 kW (HP) at r.p.m.	3.1 (4.2) at 3,000 kW (HP) at r.p.m.	5.1 (7.0) at 3,000 kW (HP) at r.p.m.	4.6 (6.2) at 3,000 kW (HP) at r.p.m.
Working speed, m/min	0 – 20	0 – 20	0 – 22	0 – 22
Dimensions (L x W x H), cm	135 x 50 x 106	135 x 50 x 106	155 x 55 x 107	155 x 55 x 107


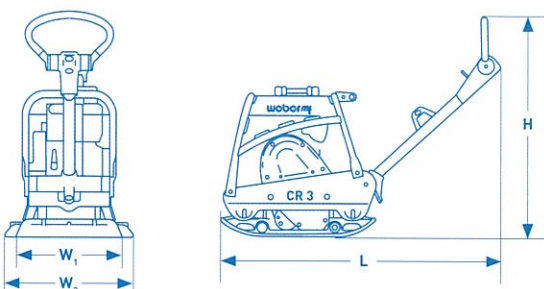


REVERSIBLE SOIL COMPACTOR CR 3

The all-rounder

ADVANTAGES

- Hydraulic control for infinitely variable forward and reverse travel.
- Low hand/arm vibrations.
- Work without getting tired thanks to a height-adjustable guide bar and low hand-arm vibration handles.
- The engine is protected against external damage by a rugged protection frame and engine cover.
- Low maintenance requirements thanks to the centrifugal clutch with automatic tensioning feature.
- Simple maintenance as all maintenance components are easily accessible.
- Safe and quick loading thanks to the large, folding lifting eye.
- Flexible operation with regards to working widths thanks to extension plates.
- Higher operating convenience with electric starter.



AREAS OF APPLICATION

- Landscape.
- Sand and gravel compaction applications.
- Compaction of paving stones.

→ AVAILABLE ACCESSORIES

- Extension plates.
- Polyurethane pad.
- Wheel kit.

